


Note

1. Case is internally connected to 0V.
2. Case finish, matt black powder coat.
3. Preset high voltage and discriminator levels.
4. USB output.
5. Typical input current 120mA at 5V.

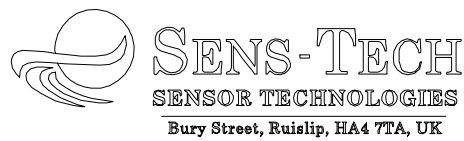

Issue	Date	C/Note No.	Sign
1	05.01.10		

Material
Finish
Surface finish Unless otherwise specified

Drawn by M. Stoodley
Date 5 January 2010
Scale 1:1
Checked M. Stoodley
Approved A. Sellars
Sheet size A3 F/DO007 issue 1

Project P25USB-01
Title Photodetector module
Drawing Number 25894 G 2324
Sheet 1 of 1

Limits on all dimensions unless otherwise stated

Linear dimensions $\pm 0.1\text{mm}$

Angular dimensions $\pm 0.1^\circ$



Confidentiality Notice. This document (including all information contained therein) is owned by Sens-Tech Limited and must be kept in confidence and used solely for the owner's specified purposes. This document must not be copied or reproduced, nor divulged, in whole or part, without the owner's prior written consent.