



DESCRIPTION

The PS1819 is a compact photomultiplier power base incorporating a positive high voltage supply and a CW voltage divider. It is suitable for use with all 10 stage, 52 mm diameter, capped photomultipliers with an overall voltage range of +100 to +1800 V.

It is housed in a cylindrical metal enclosure to provide electrical screening. Low voltage connections are by 450 mm long insulated leads, and the anode output is via a 450 mm long RG174U screened coaxial cable.

Dynode potentials are generated directly on the pins of a B14A photomultiplier tube socket.

The overall operating voltage for the photomultiplier can be precisely set using any one of the three programming options **shown in the programming options section.**

APPLICATIONS

The PS1819 is suitable for the following applications:

- Pulsed light
- Photon counting



FEATURES

- Compact design
- Freedom from high voltage cables
- Low ripple
- Exceptional voltage divider stability with varying anode current
- Pulse height linearity up to 30 mA peak currents
- Sleep mode

PS1819 DATA SHEET

PHOTOMULTIPLIER POWER BASE (POSITIVE)



SENS - TECH


SPECIFICATION

INPUT POWER AT V MAX = +1800 V +5 V, 10 mA	WARM UP TIME TO 1 % OF FINAL O/P < 1 s
FULL LOAD CONDITION +5 V, 15mA	MAXIMUM EQUIVALENT ANODE CURRENT 100 μ A
OUTPUT VOLTAGE RANGE +100 V to +1800 V	ANODE RIPPLE WITH 10 Ω / 20 PF 1KV 5 mV p-p
LINE REGULATION 0.05 % /V	WEIGHT 150g
TEMPERATURE COEFFICIENT <0.02 % $^{\circ}$ C ⁻¹	

RATINGS

INPUT VOLTAGE (PS1819/5) +4.75 V to +6.0 V
CONTROL VOLTAGE 0 to +1.8 V
TEMPERATURE (OPERATING) + 5 $^{\circ}$ C to +55 $^{\circ}$ C

SCHEMATIC DIAGRAM

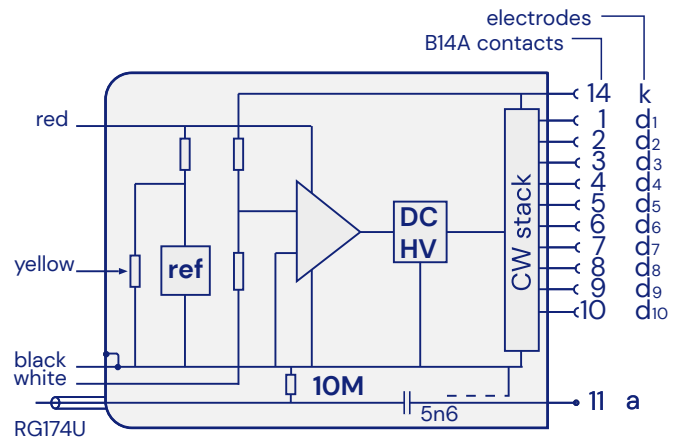

Example of output voltage with 1.300 V applied to control (white) wire

contact	electrode	voltage	contact	electrode	voltage
1	d ₁	+300	8	d ₈	+1000
2	d ₂	+400	9	d ₉	+1100
3	d ₃	+500	10	d ₁₀	+1200
4	d ₄	+600	11	a	+1300
5	d ₅	+700	12	nc	-
6	d ₆	+800	13	nc	-
7	d ₇	+900	14	k	0V

nc - no connection

anode load 100 k Ω

PS1819 DATA SHEET


PHOTOMULTIPLIER POWER BASE (POSITIVE)



SENS - TECH

VOLTAGE DISTRIBUTION

The photomultiplier pin configuration compatible with this power base is given below. Note that an anode load resistor of 100 kΩ is included.

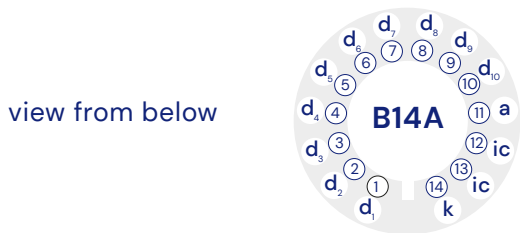

k	d ₁₂	d	d ₉	d ₁₀	a
3/13 V	1/13 V	1/13 V	1/13 V	1/13 V	


note: V is the high voltage, HV

SLEEP MODE


The power consumption can be reduced by half to one third of its normal level by activating the sleep mode. This is done by taking the control voltage (white) to 0 V.

PROGRAMMING OPTIONS


Internal potentiometer
(access from back of power supply, clockwise to increase HV)

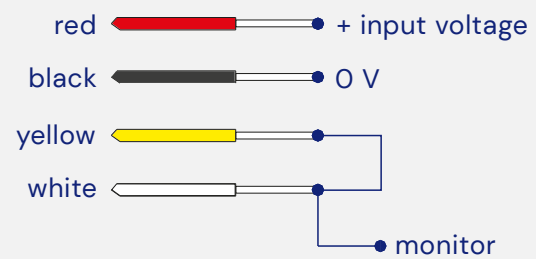

External potentiometer

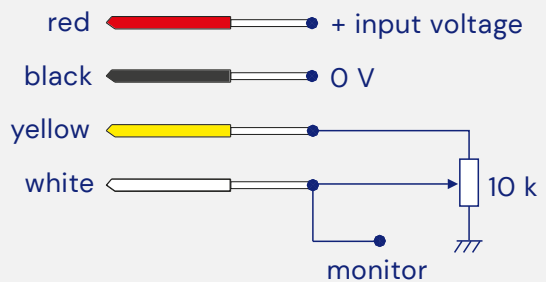

External voltage

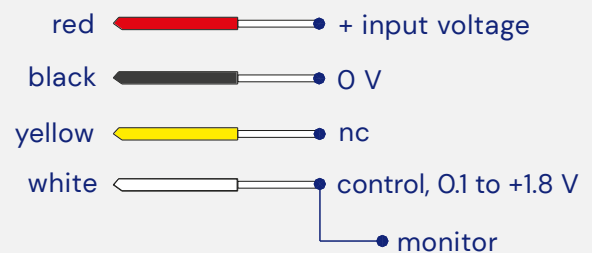

nc: no connection – isolated lead

Voltage monitor: 1/1000 of the HV applied to photomultiplier


PS1819 DATA SHEET

PHOTOMULTIPLIER POWER BASE (POSITIVE)



SENS - TECH

OUTLINE DRAWING MM

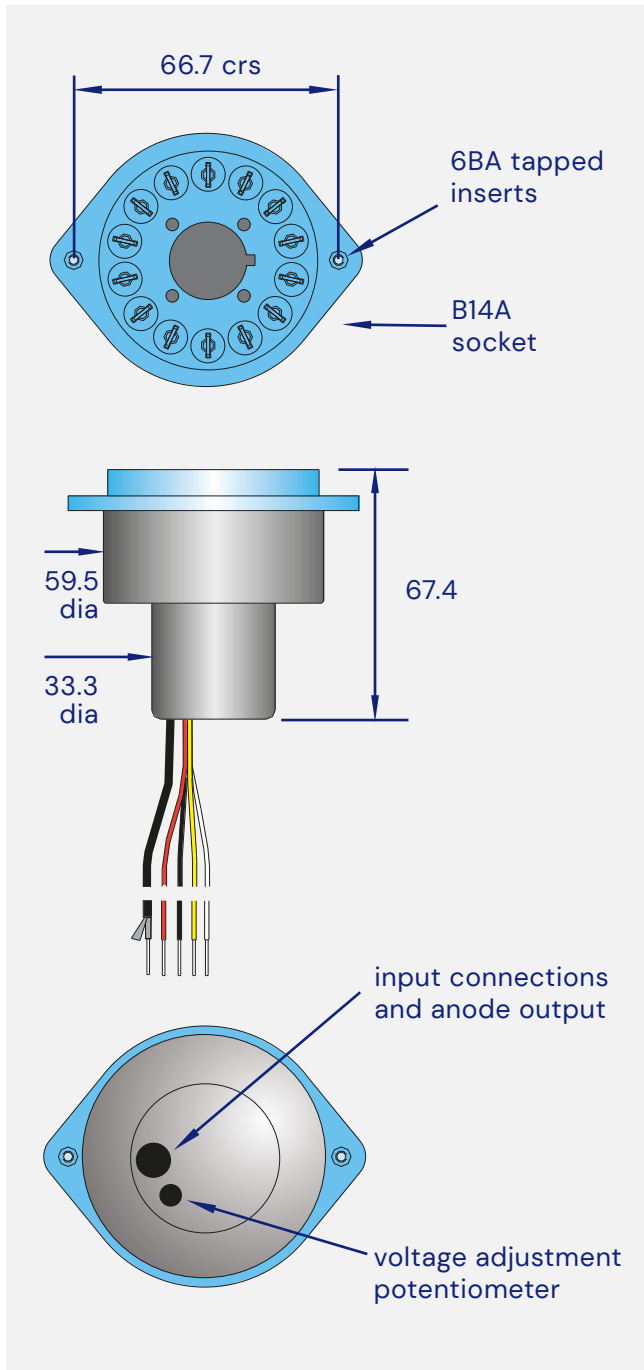

ORDERING INFORMATION

ITEM	ORDERING CODE
PS1819, +5 V	PS1819/5
PS1819, +5V, flange	PS1819/5F

WARNING

High voltages generated by these products present an electrical shock hazard and appropriate precautions must be taken. They must be installed by qualified personnel and operated within the specified ratings.

The PS1819 is despatched with the internal potentiometer set to zero.

Do not operate outside the ratings limits. This may result in loss of performance or permanent damage to the PS1819. Do not exceed the ratings of the photomultiplier as this may damage the photomultiplier and the power supply.